






# ATLAS

An elegant design and just 10 mm thickness, **ATLAS** light fittings are designed for office buildings, conference halls, pharmacies. TIR technology eliminates the pixel effect from the LED's light source .






- Installation: Conference rooms, office lighting
- Colour temperature: warm, neutral, cold
- Colour rendering index: CRI > 80
- Ingress protection: IP20
- Power supply: 230 V / 50 Hz
- Safety class: I
- Operating temperature range: + 5°C . . . + 40°C
- Light distribution: A

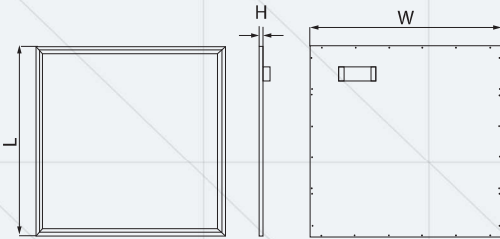


Code	Nominal power	Diffuser	Luminous flux	Dimensions; Weight ( L x W x H );( kg )	Observations
RS 82019-001	30 W	polycarbonate	3300 lm	595 x 595 x 10 mm 3,2 kg	-
RS 82019-002	30 W	polycarbonate	3300 lm	605 x 602 x 50 mm 3,4 kg	-
RS 82019-003	16 W	polycarbonate	1800 lm	295 x 595 x 10 mm 2 kg	-
RS 82019-004	30 W	plexiglass	3300 lm	1195 x 295 x 10 mm 2,5 kg	-
RS 82019-005	33 W	plexiglass	3300 lm	595 x 595 x 10 mm 3,6 kg	Ni-Cd batteries kit 4,8 V / 1,6 Ah
RS 82019-006	33 W	plexiglass	3300 lm	595 x 595 x 10 mm 3,7 kg	Ni-Cd batteries kit 4,8 V / 4,5 Ah
RS 82019-007	33 W	plexiglass	3300 lm	602 x 602 x 44 mm 4,6 kg	Ni-Cd batteries kit 4,8 V / 1,6 Ah
RS 82019-008	30 W	plexiglass	3300 lm	605 x 602 x 50 mm 4,6 kg	Ni-Mh batteries kit 4,8 V / 4,0 Ah

Compliance standards :  
 SR EN 60598-1:2015+AC:2016  
 SR EN 60598-2-2:2012  
 SR EN 62031:2009+A1:2013+  
 A2:2015  
 SR EN 55015:2014+A1:2015  
 SR EN 61000-3-2:2015  
 SR EN 61000-3-3:2014  
 SR EN 61547:2010



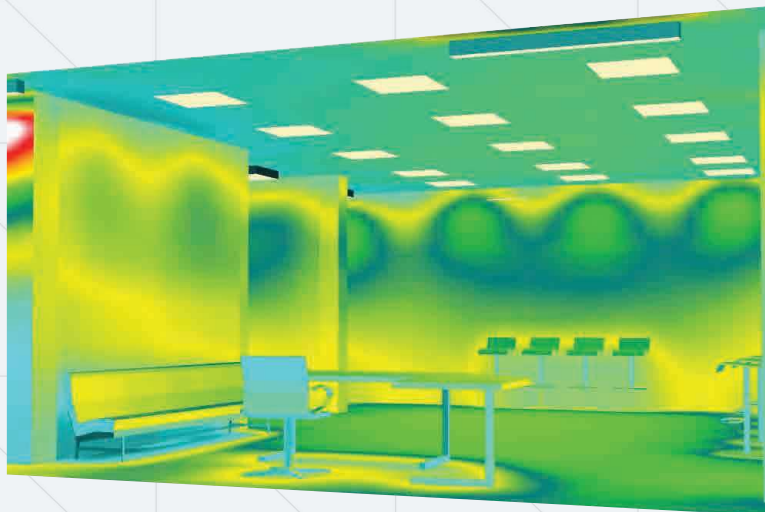

Height of space : 3,000 m  
 Maintenance factor : 0,90



Surface	$\rho$ [%]	$E_m$ [lx]	$E_{min}$ [lx]	$E_{max}$ [lx]	$u_0$
Usable surface	/	723	36	1244	0.050
Floor	41	546	20	1095	/
Ceiling	70	227	40	810	/
Walls	50	347	33	3520	/