





INDUS


Special created to illuminate the emergency escape route and to signal the escape routes, the **INDUS** lighting devices are perfect to be mounted in any public space.

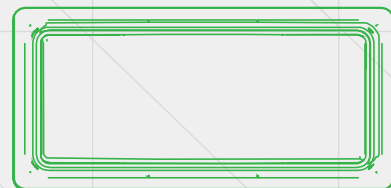

INDUS




- Installation: Emergency lighting
- Colour temperature: warm, neutral, cold
- Colour rendering index: CRI > 80
- Ingress protection: IP65/ IP44
- Power supply: 230 V / 50 Hz
- Safety class: II
- Light distribution: A
- Operating temperature: max. + 40°C

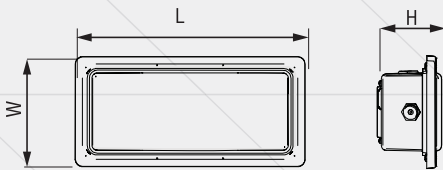

Code	Nominal power	Diffuser	Luminous flux	Dimensions (L x W x H)	Observations
RS 81140 E	7 W	transparent	475 lm	356 x 136 x 84 mm 0,7 kg	-
RS 81140 DS1	8 W	transparent	440 lm	356 x 136 x 84 mm 1,2 kg	Ni-Cd batteries 4,8 V / 1,6 Ah battery autonomy: 60 min.
RS 81312-006	10 W	transparent	600 lm	317 x 153 x 87 mm 1,1 kg	Ni-Cd batteries 4,8 V / 4,5 Ah battery autonomy: 180 min.
RS 81312-009	10 W	transparent	600 lm	317 x 153 x 87 mm 1,1 kg	Ni-Cd batteries 4,8 V / 1,6 Ah battery autonomy: 60 min.

* Signaling variants

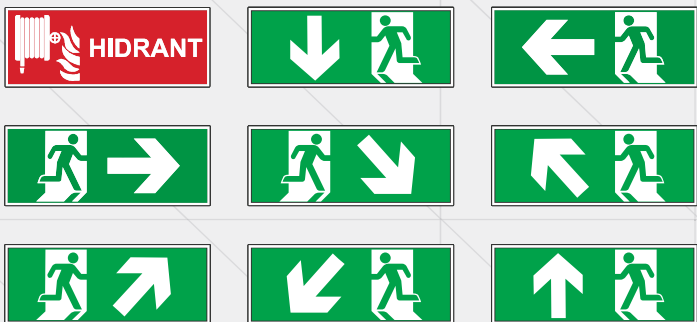

Compliance standards:
 SR EN 60598-1:2015
 +AC:2016
 SR EN 60598-2-22:2015
 +AC:2015+AC:2016
 SR EN 62031:2009+A1:2013
 +A2:2015
 SR EN 55015:2014+A1:2015
 SR EN 61000-3-2:2015
 SR EN 61000-3-3:2014
 SR EN 61547:2010

