




PHOENIX

The **PHOENIX** lantern with LED is used in street lighting, for pedestrian areas. The main reason is its zinc-plated sheet metal housing, coated under electrostatic charge, and its matte plexiglass diffuser. With an attractive retro design, it creates a pleasant environment.

PHOENIX

- Installation: Pedestrian lighting
- Colour temperature: warm, neutral, cold
- Colour rendering index: CRI > 80
- Ingress protection: IP66
- Power supply: 230 V / 50 Hz
- Safety class: I
- Operating temperature range: - 30°C . . . + 45°C
- Pipe mounting: Ø 48 - 60

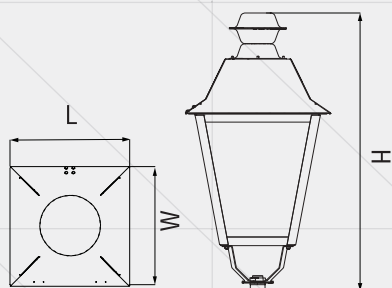

Code	Nominal power	Diffuser	Luminous flux	Dimensions; Weight (L x W x H);(kg)	Observations
RS 81708-003	60 W	plexiglass	5500 lm	500 x 500 x 850 mm 8 kg	-

Compliance standards :
 SR EN 60598-1:2015
 +AC:2016
 SR EN 60598-2-3:2004
 +A1:2012
 SR EN 62031:2009+A1:2013
 +A2:2015 art. 13.2 si 15
 SR EN 55015:2014+A1:2015
 SR EN 61000-3-2:2015
 SR EN 61000-3-3:2014
 SR EN 61547:2010



PHOENIX

